


SPECIFICATIONS



Model Number: CLE2L2
Part Number: 19020188A

Version: 02
Aug 07, 2018

Mechanical Drawing:

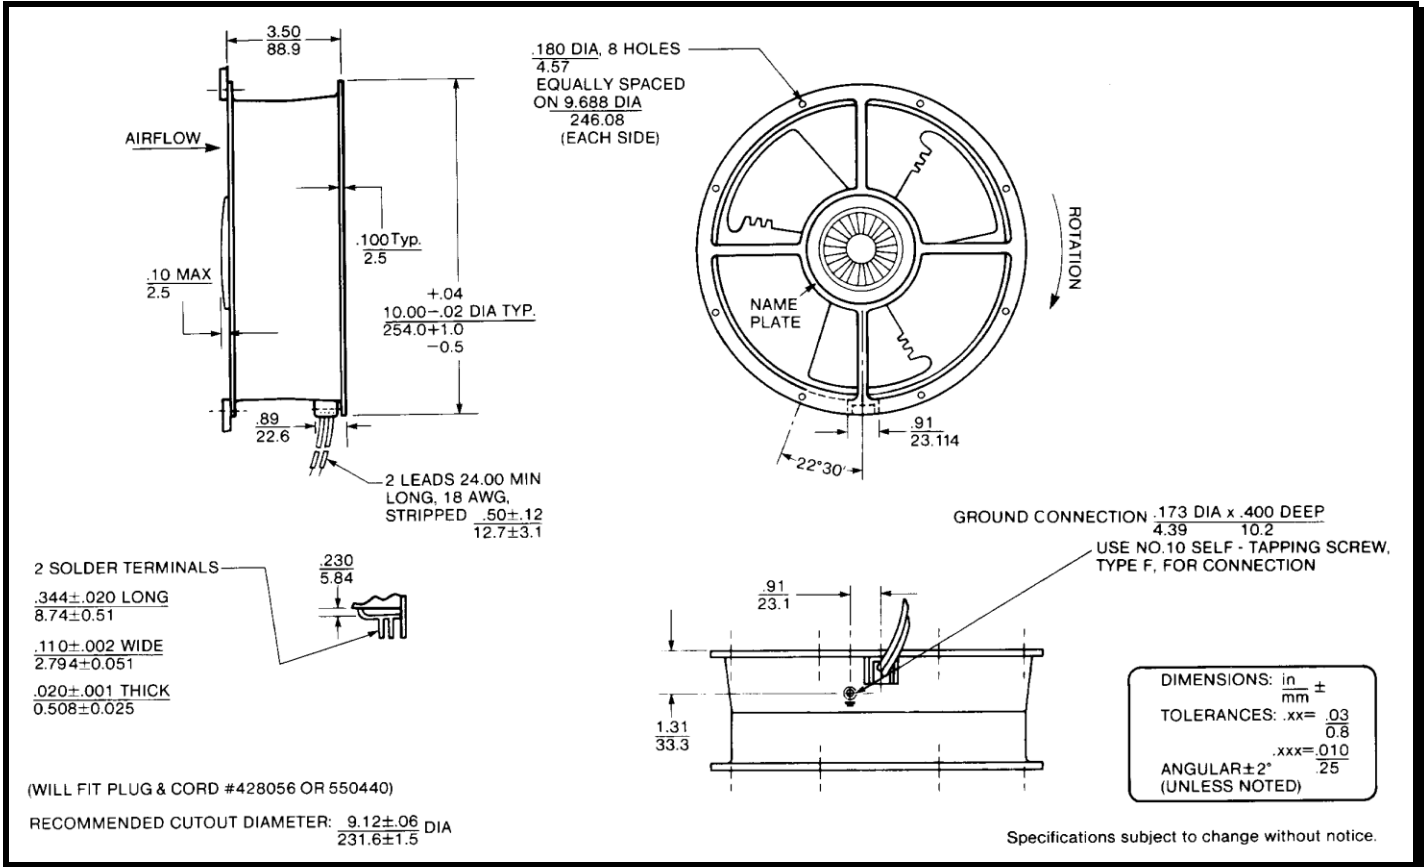

Motor:

Nominal Voltage	= 115 VAC
Frequency	= 50 / 60 Hz
Nominal Running Current	= 0.48 / 0.50 Amps
Max. Locked Rotor Current	= 0.70 amps
Running Power	= 67/61 Watts
Average Speed	= 1400 / 1650 RPM
Bearings	= Ball
Air Flow	= 455 / 550 CFM
Acoustic:	= 45.2 / 49.2 dBA

Construction:

Venturi: Aluminum, Black.
 Propeller: Plastic, Black, UL 94V-0

Life Expectancy:

This fan is designed for continuous duty life of 46,000 hours at 70°C.

Additional Features:

Permanent Split Capacitor Motor
 Automatic Reset Thermal Protector
 Feathered Edge Propeller
 Operating Temperature: -10°C to 70°C
 Storage Temperature: -40°C to 85°C

Termination:

24" Lead wires, 18 AWG, UL 1015

Agency Approvals:

UL, CUL, CE

PQ Curve:

